



KPONY



CONTROL PANELS:

PONY ———— CP.PONY



AUTOMATIONS FOR SLIDING GATES RESIDENTIAL USE

with integrated control box and receiver
up to 350 kg




24 Vdc

- 24 Vdc geared motor with built-in control unit and energy saving ESA SYSTEM
- Amperometric sensor obstacle detection system to prevent crushing
- Battery back up system ready
- The control unit is positioned in such a way as to make programming operations simple, easy and immediate

■ COMPLETE KITS

KPONY 9592170

- 1 **PONY324** 24 Vdc Operator with control panel and built-in receiver. ESA SYSTEM technology included
- 1 **PUPILLA.F** Pair of photocells
- 1 **TO.GO2WV** 433.92 MHz Transmitter

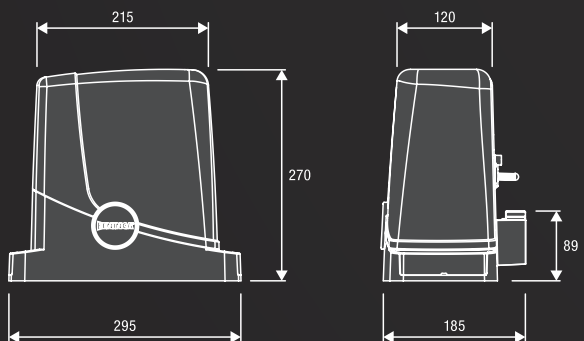



RI.M4F
9272010

M4 rack 30x12x1000mm slotted and galvanized. Supplied with M6 metric screws and threaded spacers.

Packaging: 4 pcs



RI.M4Z
9272030

M4 galvanized rack (22x22x2000 mm).

Packaging: 2 pcs



RI.M4P
9272020

M4 Nylon rack with steel core, 28x40x1000 mm. Slotted, supplied with self-drilling screws.

Packaging: 10 pcs



MLS
9387001

Magnetic limit switches for PONY. Suitable for snowy places.








ID.TA
9846019

Warning board.



KSUN
9611004

KIT for system operation via solar panel. For 24 Vdc models.



 **MADE IN ITALY**

AUTOMATISMI BENINCA SpA • via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • F +39 0444 759728 • sales@beninca.it

TECHNICAL DATA

PONY324

Power supply	230 Vac (50-60Hz)
Motor supply	24 Vdc
Max absorbed current	0,6 A
Power consumption in stand-by	8 mA
Max Thrust	321 N
Opening speed	10 m/min
Operation cycle	30%
Protection level	IP44
Operating temperature	-20°C /+50°C
Max gate weight	350 kg
Driving gear for rack	M4 Z14
Weight	6,8 kg
Version	KIT only
Items no. per pallet	-
Kits no. per pallet	36